



# Aliva<sup>®</sup>-572 Degassing nozzle liner



**for hot or cold refractory repair  
for snorkels in vakuum plants  
spraying inside and outside  
more economical**

## Description

The degassing nozzle liner **Aliva®-572** is built for automatic/manual spraying inside and outside of the nozzles of RH-Degassing Units.


After spraying the inside of one nozzle and the outside of the other nozzle, the spraying unit will be rotated by 180 degrees. In this position, the remaining untreated surfaces of the degassing nozzles may be treated the same way as mentioned above, if required by using different program settings.

### Dimensions


Height approx.	4500 mm
Working area width approx.	5000 mm
Working area depth approx.	3000 mm
Weight approx.	3000 kg

## Operating


Parameter setting  
automatic mode inside / outside

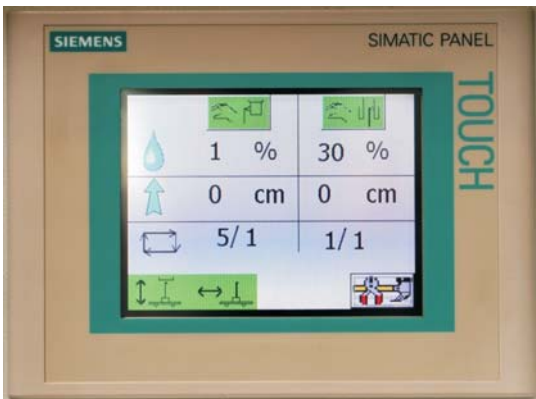

Remote control manual mode

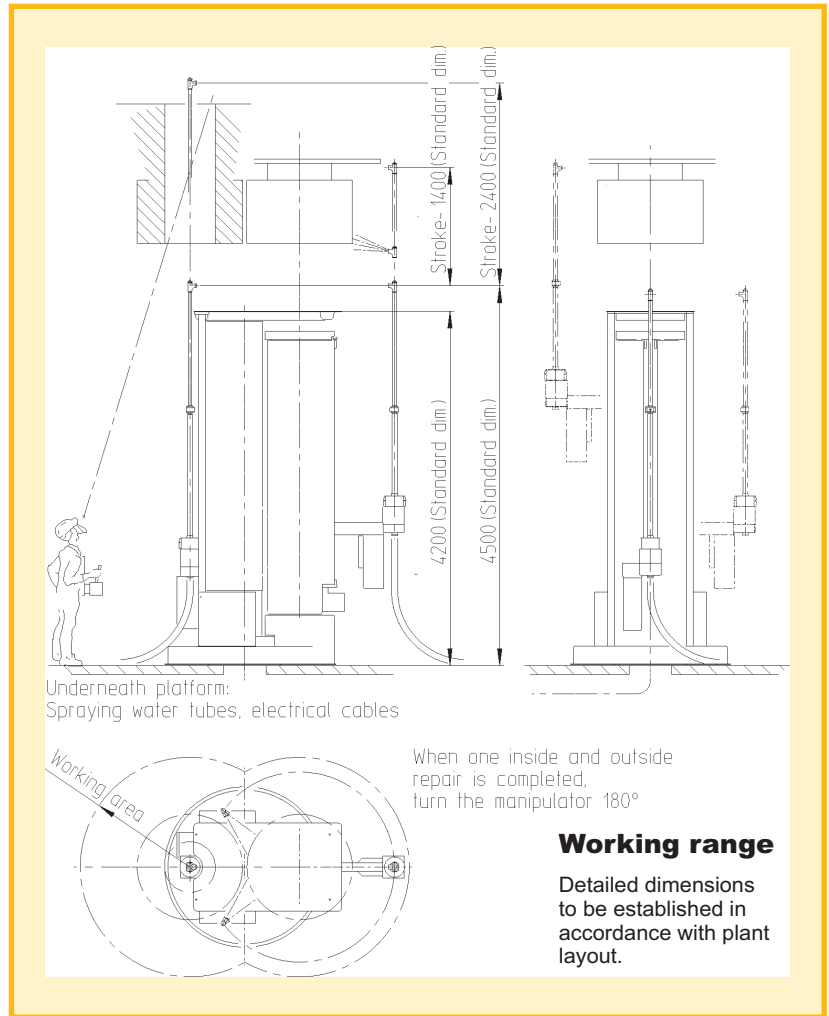

Control panel

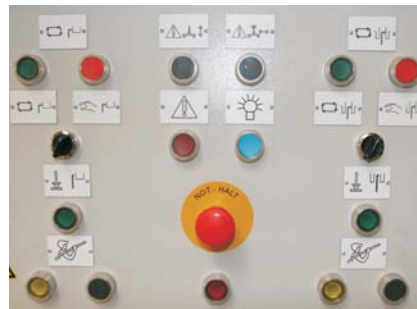

### Technical Data

Voltage	3x200-500 V
Frequency	50/60 Hz
Installed power approx.	10 kW
Control voltage	24 V DC
Controlled by	PLC (Siemens)
Air pressure	6 bar
Air consumption approx.	6 m <sup>3</sup> /min
Water pressure min.	4 bar
Water consumption approx.	200-500 l/h

Technical and design modifications remain reserved at all times. Technical properties have been achieved under theoretical and normal conditions. Please consult the respective machine manual for all matters related to operations and maintenance.

For us a matter of principle



**Sika Schweiz AG** aliva equipment  
Tüffenwies 16 CH-8048 Zürich / Switzerland  
Phone ++ 41 58 436 32 97 www.sika.com  
Fax ++ 41 58 436 41 40 mueller.viktor@ch.sika.com

Your local dealer